

AVR Series 230V 750VA 450W Ultra-Compact Line-Interactive UPS with USB port, C13 Outlets

MODEL NUMBER: **AVRX750U**



Highlights

- 750VA ultra-compact 230V line interactive UPS
- Corrects brownouts and overvoltages from 159V to 282V
- 3 UPS battery supported outlets, 3 surge-only outlets
- USB port, TEL/DSL protection, Wall mountable
- C14 inlet and 6 C13 outlets

Package Includes

- AVR750U UPS System
- USB cable
- Two C13 to C14 power cables
- Instruction manual

Description

Tripp Lite's AVR750U Ultra-Compact Line Interactive UPS offers complete power protection for desktop PCs, network workstations and a wide variety of professional and consumer electronic devices. Uninterruptible Power Supply / UPS circuits switch to battery backup mode within milliseconds to keep connected equipment running without interruption or data loss during power failures. Automatic Voltage Regulation / AVR power conditioning maintains smooth, continuous operation of connected equipment during brownouts and overvoltages. Surge-only outlets offer convenient protection for printers and other desktop accessories not requiring battery support. AC and dataline surge suppression prevents connected equipment damage. USB communications port supports built-in power management and auto-shutdown features of Windows and Mac OS X or full featured monitoring and data-saving auto-shutdown options using Tripp Lite's free PowerAlert monitoring software.

Features

- AVR750U ultra-compact 230V line interactive UPS offers complete AC power protection from blackouts, brownouts and transient surges
- 750VA / 450 watt UPS output capacity
- Uninterruptible Power Supply / UPS operation maintains battery-derived AC output during blackouts to prevent data loss and system downtime for connected equipment
- Built-in USB port enables data-saving unattended shutdown when used with Tripp Lite's PowerAlert software, available via FREE download from www.tripplite.com
- HID-compliant USB port also enables integration with built-in power management and auto shutdown features of Windows and Mac OS X
- Automatic Voltage Regulation / AVR corrects extended brownouts and overvoltages from 159 to 282V, without using battery power
- 3 minutes runtime at 100% load (450 watts), 10 minutes runtime at 50% load (225 watts)
- 44 minutes runtime for a desktop computer system consuming 80 watts continuous
- 6 total C13 outlets; Includes two 2m C13 to C14 power cables
- 3 UPS battery backup outlets, plus 3 additional surge-only outlets
- C14 inlet supports a variety of site specific input cordsets
- Network grade AC surge and lightning protection is available from all outlets; Built-in data line surge suppression protects a single dialup or DSL line
- Supports Tripp Lite's Watchdog system service to restore operation to locked equipment through soft reboot of application/OS or hard power off/on reboot of connected equipment, ideal for unattended kiosk applications



- Built-in grounding lug
- Hot swappable user battery replacement
- Optional PDUBHV10 bypass PDU enables hot-swappable UPS replacement with no disruption to connected equipment
- Space saving, ultra-compact housing with support for wall-mount, desktop or floor placement

Specifications


| General Info | |
|---|---|
| RoHS | Y |
| OUTPUT | |
| Output Volt Amp Capacity (VA) | 750 |
| Output Watt Capacity (Watts) | 450 |
| Nominal Output Voltage(s) Supported | 220V; 230V; 240V |
| Nominal Voltage Details | 230V nominal inverter output voltage |
| Frequency Compatibility | 50 / 60 Hz |
| Output Voltage Regulation (Line Mode) | +8%, -21% |
| Output Voltage Regulation (Battery Mode) | +/- 5% |
| Output Receptacles | (6) C13 |
| Included Output Power Cables | Includes 2 C13 to C14 output power cables |
| UPS Output Receptacles (Surge Suppression Only) | 3 UPS outlets, 3 surge-only outlets |
| Hot-Swap PDU options | PDUBHV10 (2U / 8 C13 outlets) |
| Output AC Waveform (AC Mode) | Sine wave |
| Output AC Waveform (Battery Mode) | PWM sine wave |
| INPUT | |
| Rated input current (Maximum Load) | 10A |
| Nominal Input Voltage(s) Supported | 230V AC |
| UPS Input Connection Type | C14 inlet |
| UPS Input Connection Description | Attached 15cm line cord with C14 inlet. The C14 inlet accepts user-supplied AC power cord with country specific plug. |
| UPS Input Cord Length (ft.) | 0.5 |
| UPS Input Cord Length (m) | 0.2 |
| Input Phase | Single-Phase |



| BATTERY | |
|---|--|
| Full Load Runtime (min.) | 3 min. (450w) |
| Half Load Runtime (min.) | 10 min. (225w) |
| DC System Voltage (VDC) | 12 |
| Internal UPS Replacement Battery Cartridge | RBC51 |
| Battery Access | Battery access door |
| Battery Replacement Description | Hot-swappable, user replaceable batteries |
| VOLTAGE REGULATION | |
| Voltage Regulation Description | Automatic voltage regulation (AVR) maintains line power operation with an input voltage range of 159 to 282VAC |
| Overvoltage Correction | Input voltages between 245 and 282 are reduced by 12% |
| Undervoltage Correction | Input voltages between 159 and 205 are boosted by 14% |
| USER INTERFACE, ALERTS & CONTROLS | |
| Switches | Combination switch controls on/off power status and self-test operation |
| Audible Alarm | Audible alarm indicates power-failure and overload status |
| LED Indicators | 2 LEDs indicate power status and overload/check battery status |
| SURGE / NOISE SUPPRESSION | |
| UPS AC Suppression Joule Rating | 320 |
| UPS AC Suppression Response Time | Instantaneous |
| UPS Dataline Suppression | 1 line TEL/DSL (1 in / 1 out) |
| EMI / RFI AC Noise Suppression | Yes |
| PHYSICAL | |
| Installation Form Factors Supported with Included Accessories | Tower; Ultra-compact desktop |
| Primary Form Factor | Desktop |
| UPS Power Module Dimensions (hwd, in.) | 4 x 12 x 7 |
| UPS Power Module Dimensions (hwd, cm) | 10.2 x 30.5 x 17.8 |
| UPS Power Module Weight (lbs.) | 14.8 |
| UPS Power Module Weight (kg) | 6.7 |
| UPS Shipping Dimensions (hwd / in.) | 5.3 x 14.8 x 9.8 |



| | |
|---|---|
| UPS Shipping Dimensions (hwd / cm) | 13.5 x 37.6 x 24.9 |
| Shipping Weight (lbs.) | 15.4 |
| Shipping Weight (kg) | 7 |
| UPS Housing Material | ABS |
| ENVIRONMENTAL | |
| Operating Temperature Range | +32 to +104 degrees Fahrenheit / 0 to +40 degrees Celsius |
| Storage Temperature Range | +5 to +122 degrees Fahrenheit / -15 to +50 degrees Celsius |
| Relative Humidity | 0 to 95%, non-condensing |
| AC Mode BTU / Hr. (Full Load) | 20 |
| AC Mode Efficiency Rating (100% Load) | 98% |
| COMMUNICATIONS | |
| Communications Interface | USB (HID enabled) |
| PowerAlert Software | Free download from www.tripplite.com |
| Communications Cable | USB interface cable included |
| WatchDog Compatibility | Supports Watchdog application, OS and hard-reboot restart options for remote applications |
| Network UPS Tools Compatibility | NUT compatible. See the full list of Tripp Lite NUT compatible UPS systems at http://www.networkupstools.org/stable-hcl.html?manufacturer=Tripp Lite |
| LINE / BATTERY TRANSFER | |
| Transfer Time | 2-4 milliseconds |
| Low Voltage Transfer to Battery Power (Setpoint) | 159 |
| High Voltage Transfer to Battery Power (Setpoint) | 282 |
| SPECIAL FEATURES | |
| Cold Start (Startup in Battery Mode During a Power Failure) | Cold-start operation supported |
| High Availability UPS Features | Hot swappable batteries |
| Green Energy-Saving Features | Greater than 95% efficiency - GREEN UPS |
| CERTIFICATIONS | |
| UPS Certifications | CE; Tested to GOST (Russia); Tested to SASO (Saudi Arabia); Meets FCC Part 15 Category B (EMI) |
| WARRANTY | |

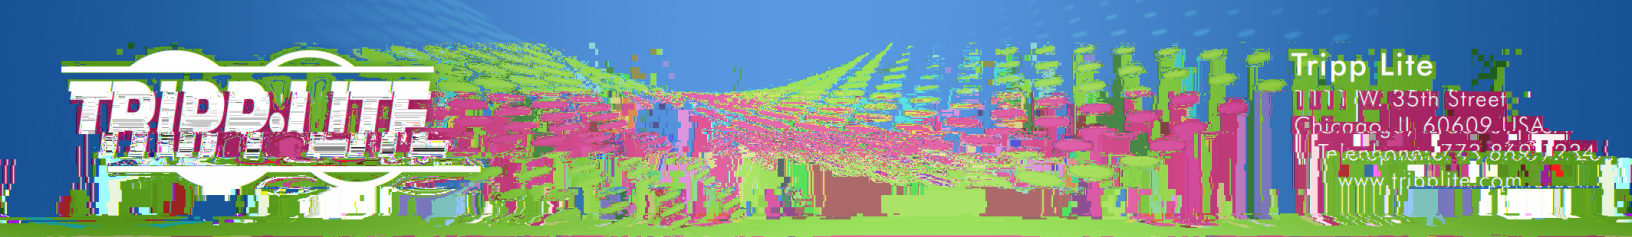

| | |
|--|-------------------------|
| Product Warranty Period (International) | 2-year limited warranty |
|--|-------------------------|

© 2015 Tripp Lite. All rights reserved. All trademarks are the sole property of their respective owners. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos may differ slightly from final products.